


OnGuard® ADV System

OnGuard ADV Server

PC Server Models	General Description
PC-Config#3	Dell® Precision 5820 XL Tower, Intel Processor, minimum 16GB memory, minimum 512GB SSD, Video Card
PC-Config#4	Dell Precision 7920 XL Rack, Intel Processor, minimum 16GB memory, minimum 512GB SSD, Video Card

Scalability Path



All versions of OnGuard can be migrated to OnGuard Cloud.

Standard Features





- Browser-based OnGuard Users client for system administration
- · Alarm Monitoring
- MapDesigner
- System Administration
- · VideoViewer (video only, web)
- CCTV interface
- · eMail interface
- Event logging
- · Anti-Passback
- · Guard tour
- · Support for BlueDiamond™ mobile credentials

Browser-Based Applications

- · Monitor & Credentials bundle
- · Access Manager
- Surveillance
- · Reports & Dashboards
- Users
- Visitor
- · WATCH (Web Access Trending & Comprehensive Health)
- · Cardholder Self Service
- Policies

Software (Optional)

- Visitor Self Service
- · Area Access Manager
- DataCondulT™
- · ID CredentialCenter
- Visitor IDVM
- · Data Exchange
- FormsDesigner
- · Biometrics / Smart Cards
- · Fire panel support
- Intrusion panel support
- Business card / Driver's license / Military ID / Passport scanning
- Elevator integration
- Intercom
- Mustering
- Terminal services support
- · Database segmentation
- Redundant Server Licensing





OnGuard® ADV System

OnGuard ADV Client

OnGuard ADV systems support up to a maximum of ten (10) client workstations and ten (10) OnGuard® Monitor & Credentials client bundles.


PC Client Models	General Description
PC-Config#6	Dell OptiPlex™ 7010, Small Form Factors, Intel Processor, minimum 16GB memory, minimum 512GB SSD, Onboard Video interface
PC-Config#7	Dell Precision 5820 XL Tower, Intel Processor, minimum 16GB memory, minimum 2TB SSD, Video Card

System Capacities

Category	Standard Licensing	Expansion Capability
Cardholders	Unlimited*	Unlimited*
Card Readers	64	256
Thick Client Workstations	1	10
Browser-based Monitor & Credential Bundles	1	10
Holidays / Time Zones	255 (per segment, each)	255 (per segment, each)
Alarm Inputs / Outputs	Unlimited*	Unlimited*
Access Levels	32,000 per segment	32,000 per segment
ILS Locks - 1024	-	1024

^{*}OnGuard offers scalability that is only limited by the physical limitations of your system size.

OnGuard® ADV System

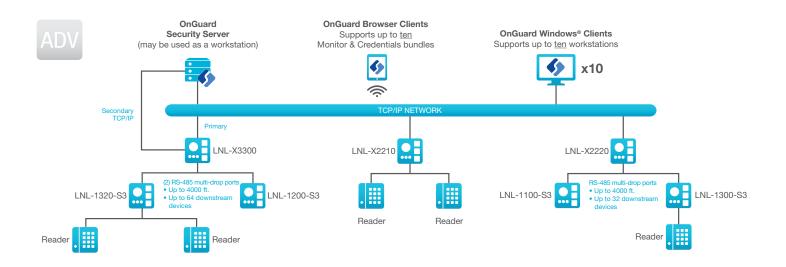

UL-Listed Enclosures and Power Supplies

LNL-CTX	Enclosure with lock and tamper switch, supports up to two (2) field hardware devices (12" x 16" x 4.5")
LNL-CTX-6	Enclosure with lock and tamper switch, supports up to six (6) field hardware devices (18" x 24" x 4.5")
LNL-AL400ULX	12VDC 4A output, 120VAC (1.6 amps) input, continuous supply current with enclosure (18" x 24" x 4.5"), lock/tamper switch, UPS capable (battery optional)
LNL-AL600ULX-4CB6	12VDC 6A output, 120VAC (1.6 amps) input, continuous supply current with enclosure (12" x 16" x 4.5"), power distribution module, lock and tamper switch. UPS capable (battery optional)

Peripheral Hardware

Direct Card Printer Support

OnGuard® supports the following printer brands: Zebra®, MAGICARD®, NISCA®, and Fargo®. Specific models support inline LenelS2 USB Image Capture Kit, MIFARE®, and magnetic stripe encoding.

LenelS2 USB Image Capture Kit

Kit includes a high resolution CCD (NTSC or PAL) camera with software zoom capabilities, a fully-synchronized cool white built-in flash, a tripod system with a powered base, TWAIN-compliant software, a USB communication cable and a universal power cable. The camera is USB 2.0-compliant, producing high resolution live video for image capture using the OnGuard ID CredentialCenter application (any badging client or mobile badging station). The built-in flash illuminates both video fields evenly.

Server Upgrades

Part #	Path
UPS-64PRO	ADV to PRO*
UPS-64PROI	ADV to PROI*
UPS-IDPRO	IDADV to IDPRO*

*no client upgrades required



LenelS2.com

Specifications subject to change without notice.