

LenelS2 Relayed Output Blade

Overview

LenelS2™ Relayed Output Application Blade is an interface board with eight Form C relay output points to support a wide range of devices. The eight programmable output relays can be configured for locks or auxiliary devices. Relay status is activated by card reader operation, event triggers and manual activation. Compatible devices include alarm annunciation devices, indicator lights, elevator control circuits, alarm panels and more.

Up to seven LenelS2 Application Blades in any combination can be supported by an Network Node. LenelS2 Application Blades are easy to install – Nodes automatically recognize and address them without jumpers or switches. Power and communications are delivered to every LenelS2 Application Blade via a ribbon cable bus.


Key Features

Inputs


- **Device Support:** Supports alarm annunciation devices, indicator lights, elevator control circuits, alarm panels and and more
- **Output Configuration:** Includes eight outputs that can be configured for locks or auxiliary devices

System

- **Automatic Discovery:** Automatically connects to Network Node without jumpers or switches
- **Hardware Compatibility:** Fits available blade slots in NetBox™, NetBox VRx™ Quatro, NetBox VR Quatro, Network Node, Network Node VRx and Network Node VR hardware

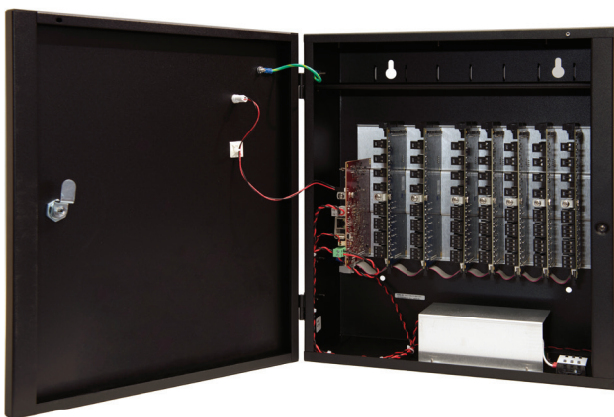

Up to seven LenelS2 Application Blades in any combination can be supported by a Network Node.

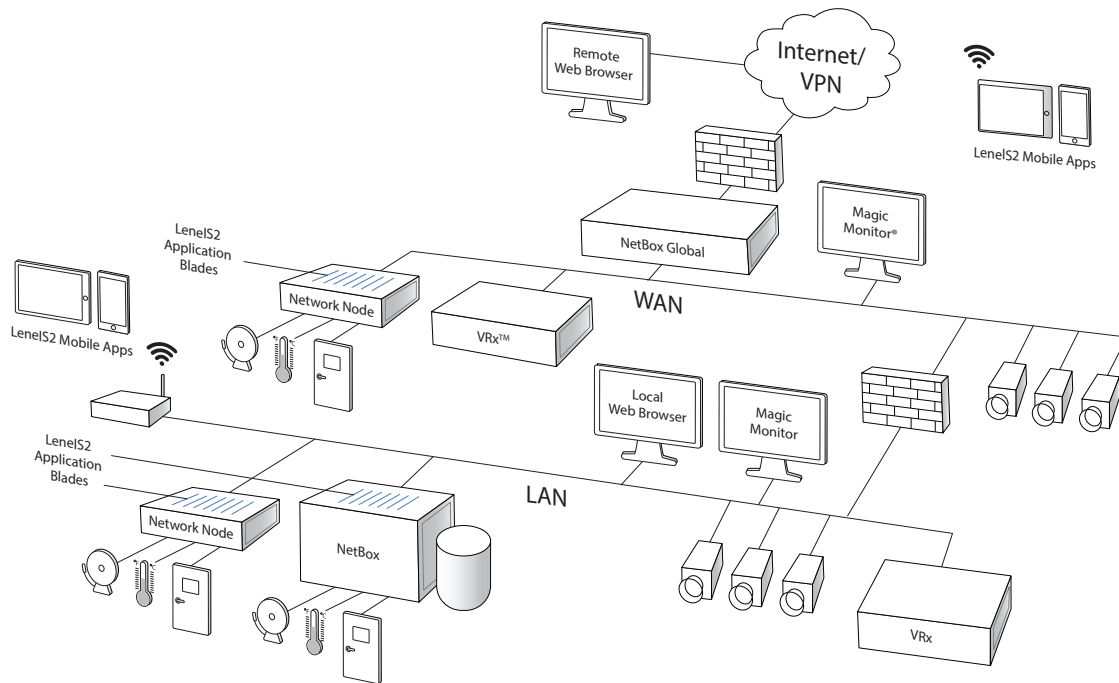

Schematic only. Not a network diagram.

Specifications – LenelS2 Relayed Output Blade

Access Control

Relay Outputs	8, Form C
Output Description	Dry, Form C, single-pole double-throw (C / NO / NC) contacts for load switching

General

Relay Contact Rating	30VDC/AC, 2.5A inductive or 5.0A non-inductive
Dimensions (H, W, D)	7.5 in x 4.0 in x 0.83 in (191 mm x 102 mm x 21.1 mm)
Weight	7.0 oz (198 g)
Operating Temperature	32°F – 95°F (0°C – 35°C)
Storage Temperature	-4° – 158°F (-20° – 70°C)
Operating Environment	Humidity 85%, non-condensing 35° C
BTU Maximum	20 per hour
Regulatory Approvals	UL, CE, RoHS
Warranty	2 years, hardware

Cabling Requirements

Relayed Output Cable	Twisted, shielded 22 AWG Belden #9462 or equivalent
Max Relayed Output Cable Distance	Determined by the peripheral device

Part Numbers

S2-OUTP	Relay controlled output application extension blade with 8 outputs
---------	--



For more information, please visit lenel2.com.

Specifications subject to change without notice.

© 2024 Honeywell International Inc. All rights reserved. All trademarks are the property of their respective owners.